

R&S® FSV Signal and Spectrum Analyzer

Signal analysis at its best



R&S®FSV Signal and Spectrum Analyzer At a glance

The R&S®FSV is the fastest and most versatile signal and spectrum analyzer available for performance-oriented, cost-conscious users working in the development, production, installation and servicing of RF systems.


In development applications, the R&S®FSV excels due to its outstanding RF properties, a 40 MHz signal analysis bandwidth that is unmatched in its class, and a wide range of analysis packages for analog modulation methods as well as wireless and wideband communications standards.

The R&S®FSV is five times faster than comparable signal and spectrum analyzers and provides measurement routines that are optimized for speed and high data throughput. This is a crucial advantage in production applications.

With its touch screen for easy operation, compact dimensions, low weight and direct support of power sensors, the R&S®FSV is the best possible choice for installation and service work.

Key facts

- Frequency range up to 3.6/7/13.6/30/40 GHz
- 40 MHz analysis bandwidth
- 0.4 dB level measurement uncertainty up to 7 GHz
- Measurement applications for GSM/EDGE (including EDGE evo), WCDMA/HSPA+, LTE, WiMAX™, WLAN, CDMA2000®, 1xEV-DO
- Easy on-site upgrading with options
- -110 dBc (1 Hz) phase noise at 10 kHz frequency offset
- +15 dBm third order intercept (TOI)
- Displayed average noise level (DANL) in 1 Hz bandwidth: -155 dBm at 1 GHz, -147 dBm at 30 GHz with preamplifier R&S®FSV-B24: -162 dBm at 30 GHz
- Removable hard drive for applications where security is a concern
- Frequency range up to 110 GHz with the R&S®FSV-B21 option integrated in the R&S®FSV30/40 and the R&S®FS-Z60/-Z75/-Z90/-Z110 harmonics mixers
- Measurement applications for vector signal analysis

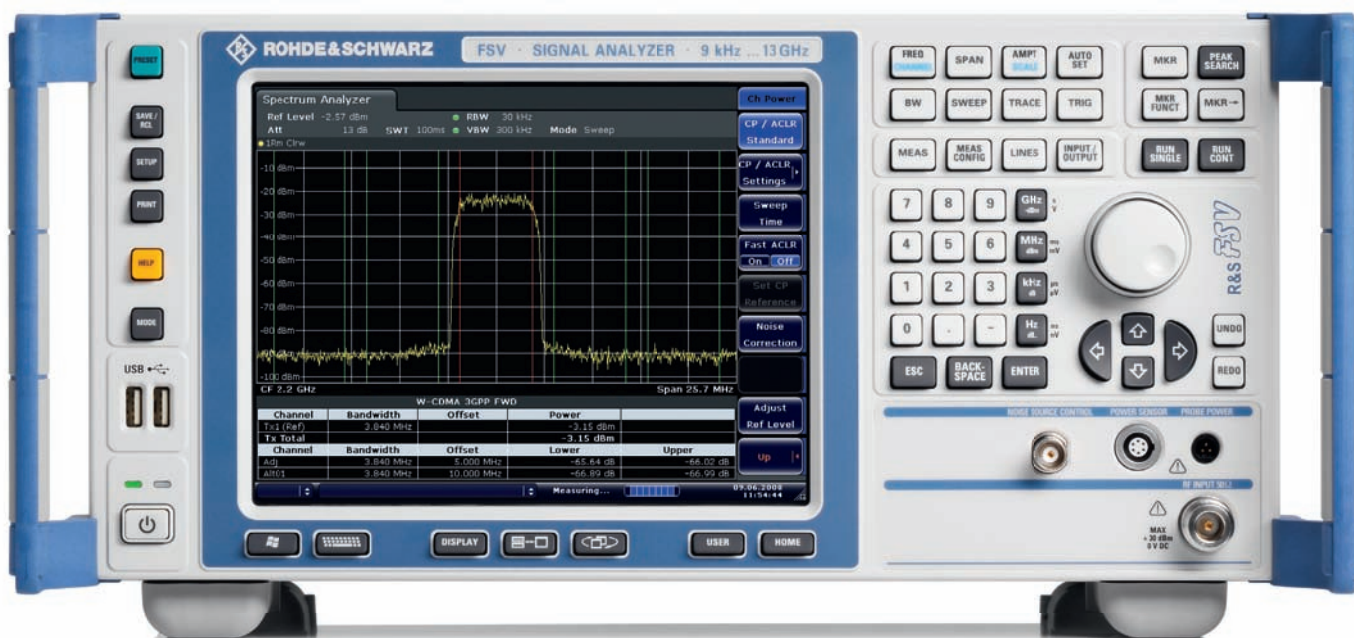

R&S®FSV Signal and Spectrum Analyzer

Benefits and key features

Ready for today's – and tomorrow's – standards

- ▮ Fully digital back-end ensures high measurement accuracy and excellent repeatability
- ▮ 40 MHz signal analysis bandwidth largest in its class; suitable for all WiMAX™ profiles and WLAN IEEE802.11n
- ▮ Largest I/Q memory depth in its class for recording long signal sequences

▷ [page 4](#)

Low test costs and high throughput for efficient production

- ▮ Up to five times faster than other signal and spectrum analyzers
- ▮ Customized test routines for production applications
- ▮ Efficient remote-control operation

▷ [page 5](#)

Wealth of functions and performance for effective use in labs

- ▮ Outstanding RF performance for a mid-range analyzer
- ▮ Unsurpassed level measurement accuracy up to 7 GHz
- ▮ Power measurement functions for analysis of digital communications systems
- ▮ Versatile marker and trace functions
- ▮ Scalar network analysis: easy measurement of frequency response, bandwidth, gain

▷ [page 6](#)

Easy, intuitive operation

- ▮ Touch screen operation
- ▮ Hotkeys for fast access to all important functions

▷ [page 7](#)

Easy transition to next generation in signal analysis

- ▮ Easy transition due to remote-control compatibility with the R&S®FSP and R&S®FSU
- ▮ Fast learning time due to functional compatibility with existing signal and spectrum analyzers from Rohde&Schwarz

▷ [page 8](#)

Low life-cycle costs

- ▮ Easy on-site upgrading with options
- ▮ Easy scalability to handle application-specific requirements
- ▮ Always up-to-date with free firmware updates

▷ [page 9](#)

"WiMAX Forum" is a registered trademark of the WiMAX Forum. "WiMAX," the WiMAX Forum logo, "WiMAX Forum Certified," and the WiMAX Forum Certified logo are trademarks of the WiMAX Forum.

CDMA2000® is a registered trademark of the Telecommunications Industry Association (TIA - USA).

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Rohde&Schwarz is under license.

Ready for today's and tomorrow's standards

Featuring a signal analysis bandwidth of up to 40 MHz – the largest in its class – the R&S®FSV is a sound investment, ready for the future. The R&S®FSV has what is needed to analyze and demodulate existing and future communications standards.

Fully digital back-end ensures high measurement accuracy and excellent repeatability


- ▮ 28 MHz signal analysis bandwidth with base unit (40 MHz optional)
- ▮ 16-bit A/D converter with 128 MHz sampling frequency ensures wide dynamic range and excellent display linearity
- ▮ 200 Msample signal memory for largest memory depth in its class
- ▮ High measurement accuracy and good repeatability with digitally implemented analysis filters

40 MHz signal analysis bandwidth largest in its class; suitable for all WiMAX™ profiles and WLAN IEEE 802.11n

Wireless communications systems are using ever larger RF bandwidths in their quest to boost data rates and transmission capacity. Due to its large analysis bandwidth and wealth of software options, the R&S®FSV signal and spectrum analyzer is the only instrument in its class that can handle all existing and most forthcoming wireless communications applications.

	28 MHz bandwidth (standard)	40 MHz bandwidth (optional)
LTE	exceeds the channel width of max. 20 MHz of LTE signals	–
WiMAX™	covers the signal bandwidths for all WiMAX™ profiles	covers signal and adjacent channels
WLAN	exceeds the 20 MHz channel width of WLAN IEEE802.11a/b/g signals	covers WLAN IEEE802.11n wideband technology
WCDMA	exceeds the 20 MHz bandwidth required for CCDF measurements on four-carrier WCDMA signals	–

ACP measurement: a wealth of predefined standards included to simplify making settings.

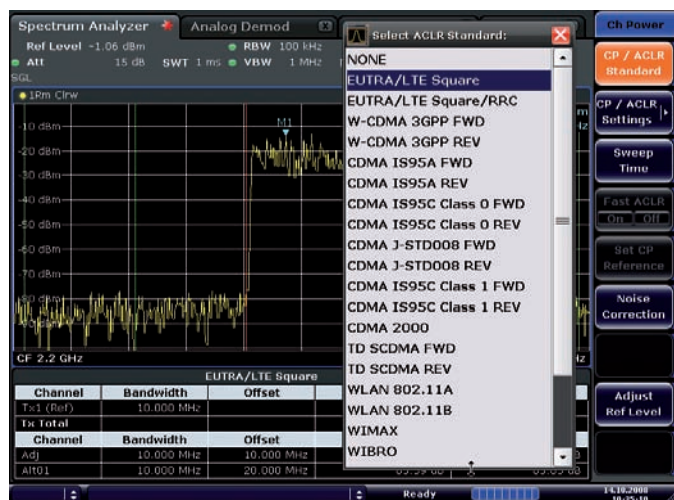

Largest I/Q memory depth in its class for recording long signal sequences

The base unit of the R&S®FSV provides an I/Q memory depth of 200 Msample. This ensures data recording over a long time period even when testing systems with high bandwidths and high sample rates. Conventional signal analyzers have an I/Q memory depth of only a few Msample.

The R&S®FSV is ideally suited for performing wideband modulation measurements during the development and production of chipsets and terminal equipment as well as in the development, maintenance and installation of infrastructures.

Low test costs and high throughput for efficient production

The R&S®FSV signal and spectrum analyzer significantly reduces total test costs in a production environment. It performs everything from simple measurements up to complex modulation analysis quickly, reliably and with low measurement uncertainty.

Fast access to I/Q data with a wide bandwidth also allows the speedy execution of complex evaluation routines in an external computer as well as use of the R&S®FSV as a fast digitizer with a wide dynamic range. The R&S®FSV signal and spectrum analyzer thus enables fast, flexible and efficient production.

Up to five times faster than other signal and spectrum analyzers

With more than 500 sweeps/s in manual operation and up to 1000 sweeps/s in remote operation, the R&S®FSV is up to five times faster than other signal and spectrum analyzers. This high measurement speed cuts production time especially in cases that require the averaging of a large number of measurements (as specified in many standards).

Customized test routines for production applications

The R&S®FSV also offers a number of functions that speed up test routines by cutting alignment and measurement time, thus increasing the overall throughput:

- Frequency list mode (LIST MODE): fast measurement on up to 300 different frequencies using different analyzer settings with a single remote-control command
- Measurement of different power levels in the time domain in a single sweep for very fast alignment (multisummary marker)
- Fast ACP measurement in the time domain with channel filters or in the frequency domain using FFT sweep
- Frequency counter with 0.1 Hz resolution at a measurement time of < 50 ms
- Fast FFT sweep mode accelerates spurious measurements and spurious searches due to fast sweep times, particularly with narrow resolution bandwidths and simultaneously large spans

Efficient remote-control operation

- GBIT LAN interface for quickly transferring large quantities of data
- Trigger interface for synchronization with the production system in LIST MODE

Measurement speed	
Sweep rate, remote control, 1000 sweep averages	1000/s (1 ms/sweep)
LIST MODE, measurement of the level of the fundamental and five harmonics	21 ms
Marker peak search	1.5 ms
Frequency change and query	15 ms
Sweep rate, manual mode	500/s (2 ms/sweep)
Fastest sweep time (zero span)	1 µs
Fastest sweep time (frequency sweep)	1 ms

Wealth of functions and performance for effective use in labs


Outstanding RF performance for a mid-range analyzer

- ▮ Displayed average noise level (DANL):
 - 155 dBm (1 Hz) at 1 GHz, –147 dBm (1 Hz) at 30 GHz
- ▮ Very low DANL even at 9 kHz: typ. –140 dBm (1 Hz)
- ▮ Third order intercept (TOI) of 15 dBm, typ. 18 dBm
- ▮ Phase noise at 10 kHz offset from carrier:
 - 106 dBc (1 Hz), typ. –110 dBc (1 Hz)
- ▮ Dynamic range for WCDMA ACLR: 73 dB
- ▮ Resolution bandwidths from 1 Hz to 10 MHz, as well as 20 MHz and 28 MHz in zero span mode (40 MHz optional)

Unsurpassed level measurement accuracy up to 7 GHz

The R&S®FSV is a leader when it comes to level measurement accuracy. Featuring a measurement uncertainty of 0.4 dB up to 7 GHz, the analyzer delivers accurate and dependable measurement results. This means that the R&S®FSV can also measure levels in the 5.8 GHz ISM band and higher satellite bands with outstanding accuracy, eliminating the need for an additional power meter in many cases. When equipped with the R&S®FSV-K9 option, the R&S®FSV also supports the direct connection of power sensors from the R&S®NRP series.

Measurement of the power of a wideband WLAN signal using the time domain power function.

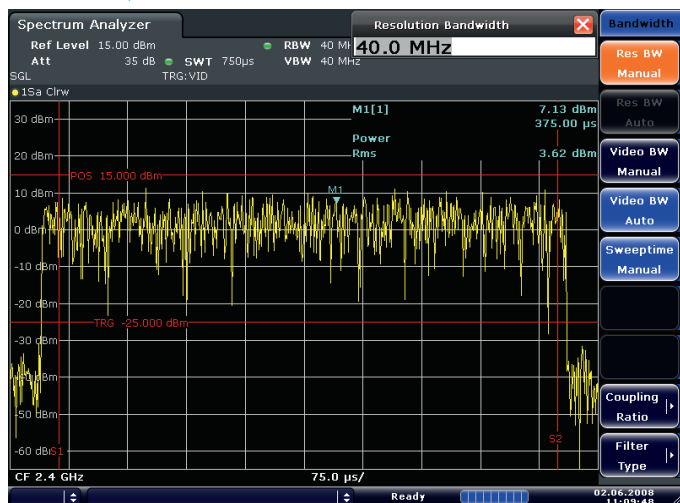

This increases the accuracy for power measurements in applications requiring extremely high precision and saves the expense of an additional power meter. The R&S®NRP-Z27/ R&S®NRP-Z37 sensors contain an integrated power splitter so that the power sensor and the R&S®FSV signal and spectrum analyzer can measure the same signal in parallel without any switching required.

Power measurement functions for the analysis of digital communications systems

Comprehensive power measurement functions are an absolute must when analyzing digital communications systems:

- ▮ Channel/adjacent channel power measurements
 - Up to 12 user channels and up to 12 adjacent channels
 - Numerous predefined test configurations for transmission standards
- ▮ Occupied bandwidth (OBW)
- ▮ Spectrum emission mask measurement
- ▮ Complementary cumulative distribution function (CCDF)
- ▮ Burst power measurement
- ▮ Spurious emissions
- ▮ C/N and C/N₀
- ▮ Complete selection of detectors: RMS, average, auto peak, pos/neg peak, sample, quasi peak

Versatile marker and trace functions

- ▮ Up to 16 markers
- ▮ Marker measurement functions such as AM modulation factor, TOI, phase noise/noise, frequency counter
- ▮ Up to six simultaneously active traces with any combination of detectors
- ▮ Selectable number of sweep points (up to 32001)
- ▮ Peak list for evaluating up to 100 peaks at the press of a key
- ▮ Limit lines for PASS/FAIL monitoring
- ▮ Transducer factors

Scalar network analysis: easy measurement of frequency response, bandwidth, gain

- ▮ External generator control allowing signal generators to be used as tracking generators to measure cable loss, filters, amplifiers, converters, multipliers
- ▮ Tracking generator up to 7 GHz with settable frequency offset up to 1 GHz to measure cable loss, filters, amplifiers, converters
- ▮ Measured frequency response characteristics can be saved directly as transducer factors and used as correction values for test setups

Easy, intuitive operation

The R&S®FSV is unsurpassed in ease of operation. By offering a touch screen, an on-screen keyboard and hotkeys, the operating concept sets new standards in meeting the expectations placed on a modern-day signal and spectrum analyzer. The ultimate customer benefit is thus fast and straightforward operation.

Touch screen operation

The R&S®FSV enables convenient, intuitive operation with its touch screen. Users can complete their work faster and in fewer steps while enjoying greater convenience. The straightforward menu-driven design also reduces learning time.

Alternatively (depending on user preferences), all functions and measurement parameters can be configured in the conventional manner by using the keys and rotary knob or mouse/keyboard. The large SVGA display ensures high resolution and good readability.

Hotkeys for fast access to all important functions

The clearly labeled keys allow fast access to all main menu items, settings and functions. Parameters such as frequency and resolution bandwidth can be directly set using these keys. Hardkeys are also provided to simplify access to frequently used functions such as PRESET, SAVE/RECALL and Marker Peak.

R&S®FSV controls

Built-in HELP function:

The context-sensitive help provides a detailed explanation of the current function and lists the associated remote-control commands. Even inexperienced users come up to speed quickly, and programming becomes a much easier task.

Touch screen with zoom function:

Convenient, intuitive operation with direct entry exactly where needed; the signal section of interest is marked with a rectangle and the marked section is enlarged to full screen size.

Automatic parameter settings at the press of a key using the **AUTO SET function**: automatic adaptation of settings to the individual measurement signal.

USB ports:

Easy firmware updates at the press of a key via USB, simple documentation of measurement results.

On-screen keyboard:

The analyzer's virtual keyboard together with the touch screen make an external keyboard completely unnecessary.

UNDO/REDO softkeys:

Up to six prior operating steps can be undone. This enables users to correct mistakes or quickly toggle between two different states.



Easy transition to the next generation in signal analysis


Easy transition due to remote-control compatibility with the R&S®FSP and R&S®FSU

The remote-control command set used in the R&S®FSV is compatible with that used in the R&S®FSP and R&S®FSU when operating in the spectrum analysis mode and also in most applications. This allows users to continue using existing remote-control programs without encountering any additional costs as they transition to the new generation in signal analysis. Replacing signal and spectrum analyzers in development and production environments is thus made easier. Introducing new instruments used in manufacturing will increase production throughput due to the increased speed provided by the R&S®FSV and it will boost efficiency and capacity in the simplest manner ever available.

Fast learning time due to functional compatibility with existing signal and spectrum analyzers from Rohde & Schwarz

The family concept from Rohde & Schwarz is also highly beneficial. The same operating concept and the largely identical functions in all analyzers are provided by the new generation as well. The R&S®FSV represents a further development of the existing concept. New features include operation with the touch screen and on-screen keyboard along with new functions such as AUTO SET and UNDO/REDO. Users can learn how to operate the new signal and spectrum analyzers in only a minimum of time.

The special compatibility mode with the R&S®FSP and R&S®FSU makes it easy to continue using existing remote-control programs.

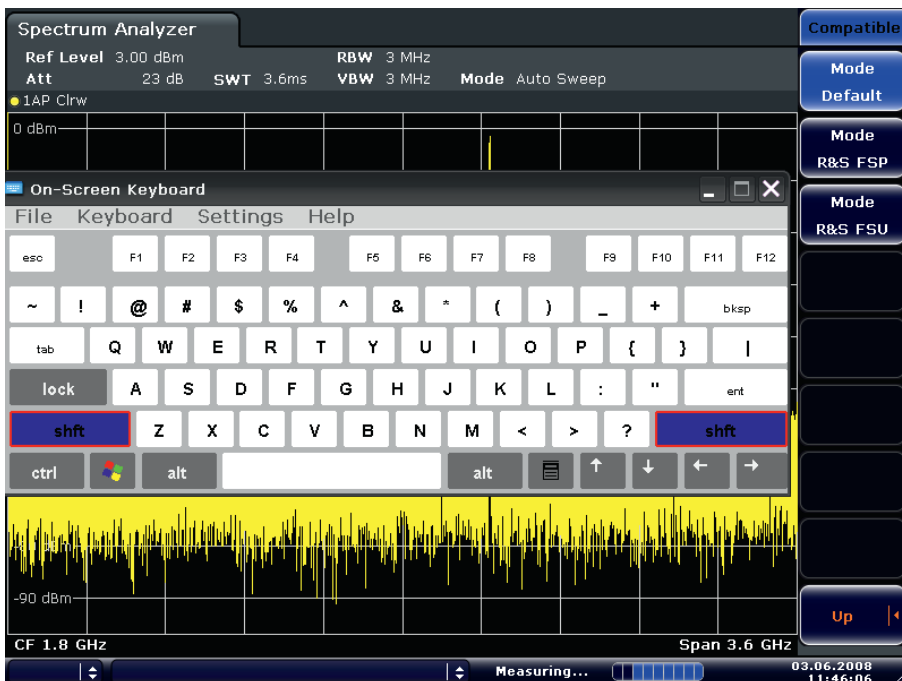

Low life-cycle costs

Easy on-site upgrading with options

The R&S®FSV can meet new requirements in the fastest possible time. The plug & play concept used for upgrading the instrument with options is unique. Users can add almost any option without having to open the instrument.

This concept offers a variety of benefits:

- No additional alignment after installation
- No recalibration
- No need to send the instrument in to a service center (i.e. negligible downtime)
- No installation costs
- Easy expandability for additional tasks

Easy scalability to handle application-specific requirements

The base unit already has all functions expected in a modern-day signal and spectrum analyzer. Using a wide variety of options, it is possible to customize the R&S®FSV to handle diverse applications in accordance with equipment needs and the available budget.

Always up-to-date with free firmware updates

The firmware used in the R&S®FSV can easily be updated with a USB memory stick or via the LAN interface. Firmware updates are free of charge and can be easily downloaded from www.rohde-schwarz.com.

Instrument rear panel with plug-in options

Instrument hard drive:

The hard drive can be easily removed and replaced with a second hard drive (R&S®FSV-B19) if measurement results and instrument settings need to be kept confidential

Additional interfaces:

IF/video output, trigger output, two additional USB ports, AUX port

Ready for future expansion



OCXO for increased frequency accuracy

Applications

Transmitter and modulation measurements in wireless communications systems

Software option/ Technology	Power	Modulation quality	Spectrum measurement	Miscellaneous	Special features
R&S®FSV-K8 Bluetooth®/EDR	<ul style="list-style-type: none"> Output power Average and peak power EDR relative TX power 	<ul style="list-style-type: none"> Deviation Initial carrier frequency tolerance (ICFT) Carrier frequency drift EDR frequency stability EDR modulation accuracy 	<ul style="list-style-type: none"> Adjacent channel power EDR in-band spurious emissions 	<ul style="list-style-type: none"> Trigger: IF power, external, free run Support for packet types DH1, DH3 and DH5 and power classes 1 to 3 	<ul style="list-style-type: none"> In line with Bluetooth RF test specification 2.0
R&S®FSV-K10 GSM/EDGE/EDGE evo	<ul style="list-style-type: none"> Power measurement in time domain including carrier power 	<ul style="list-style-type: none"> EVM Phase/frequency error Origin offset suppression 	<ul style="list-style-type: none"> Modulation spectrum Transient spectrum 	–	<ul style="list-style-type: none"> Single burst and multiburst
R&S®FSV-K72/-K73 WCDMA	<ul style="list-style-type: none"> Code domain power Code domain power versus time CCDF 	<ul style="list-style-type: none"> EVM Peak code domain error Constellation diagram Residual code domain error I/Q offset Gain imbalance Center frequency error (chip rate error) 	<ul style="list-style-type: none"> Spectrum mask ACLR Power measurement 	<ul style="list-style-type: none"> Channel table with summary of channels used on base station Timing offset 	<ul style="list-style-type: none"> Automatic detection of active channels and decoding of signal information Automatic detection of encryption code Automatic detection of HSDPA modulation format Support for signals with compressed mode Support for HSPA (HSDPA and HSUPA) Support for HSPA+ (HSDPA+ and HSUPA+)
R&S®FSV-K76/77 TD-SCDMA	<ul style="list-style-type: none"> Code domain power Code domain power versus time CCDF 	<ul style="list-style-type: none"> EVM Peak code domain error Constellation diagram Residual code domain error I/Q offset Gain imbalance Center frequency error (chip rate error) 	<ul style="list-style-type: none"> Spectrum mask ACLR Power measurement 	<ul style="list-style-type: none"> Channel table with summary of channels used on base station Timing offset Power versus time 	<ul style="list-style-type: none"> Automatic detection of active channels and decoding of signal information Automatic detection of HSDPA modulation format Support for HSPA (HSDPA and HSUPA) Support for HSPA+ (HSDPA+ and HSUPA+)
R&S®FSV-K82/-K83 CDMA2000®	<ul style="list-style-type: none"> Carrier power Code domain power Code domain power versus time CCDF 	<ul style="list-style-type: none"> RHO EVM Peak code domain error Constellation diagram Residual code domain error I/Q offset Gain imbalance Center frequency error (chip rate error) 	<ul style="list-style-type: none"> Spectrum mask ACLR Power measurement 	<ul style="list-style-type: none"> Channel table with summary of channels used on base station Timing offset 	<ul style="list-style-type: none"> Automatic detection of active channels and decoding of signal information Robust demodulation algorithms for reliable measurement of multicarrier signals

Software option/ Technology	Power	Modulation quality	Spectrum measurement	Miscellaneous	Special features
R&S®FSV-K84/-K85 1xEV-DO	<ul style="list-style-type: none"> Carrier power Code domain power Code domain power versus time CCDF 	<ul style="list-style-type: none"> RHO_{Pilot} (R&S®FSV-K84) RHO_{Data} (R&S®FSV-K84) RHO_{MAC} (R&S®FSV-K84) $RHO_{Overall}$ EVM Peak code domain error Constellation diagram Residual code domain error I/Q offset Gain imbalance Center frequency error (chip rate error) 	<ul style="list-style-type: none"> Spectrum mask ACLR Power measurement 	<ul style="list-style-type: none"> Channel table with summary of channels used on base station Timing offset 	<ul style="list-style-type: none"> Automatic detection of active channels and decoding of signal information Robust demodulation algorithms for reliable measurement of multicarrier signals
R&S®FSV-K91/-K91n WLAN IEEE 802.11a/b/g/j/n	<ul style="list-style-type: none"> Power measurement in time and frequency domains Rising/falling edge CCDF 	<ul style="list-style-type: none"> EVM Constellation diagram I/Q offset Gain imbalance Quadrature error Center frequency error (symbol clock error) 	<ul style="list-style-type: none"> Spectrum mask ACP Spectrum flatness 	<ul style="list-style-type: none"> Bit stream Signal field Averaging over multiple measurements 	<ul style="list-style-type: none"> 40 MHz bandwidth for WLAN IEEE802.11n
R&S®FSV-K93 WiMAX™ IEEE 802.16e OFDM OFDMA	<ul style="list-style-type: none"> Power measurement in time and frequency domains Rising/falling edge CCDF 	<ul style="list-style-type: none"> EVM Constellation diagram I/Q offset Gain imbalance Quadrature error Center frequency error (symbol clock error) 	<ul style="list-style-type: none"> Spectrum mask ACP Spectrum flatness 	<ul style="list-style-type: none"> Bit stream Signal field Averaging over multiple measurements Burst summary list Graphical display of DL map 	<ul style="list-style-type: none"> Automatic demodulation in line with DL map User-editable spectrum mask
R&S®FSV-K100/-K101/-K102/-K104/-K105	<ul style="list-style-type: none"> Power measurement in time and frequency domains CCDF 	<ul style="list-style-type: none"> EVM Constellation diagram I/Q offset Gain imbalance Quadrature error Center frequency error (symbol clock error) 	<ul style="list-style-type: none"> Spectrum flatness 	<ul style="list-style-type: none"> Bit stream Allocation summary list Signal flow diagram Averaging over multiple measurements 	<ul style="list-style-type: none"> Automatic detection of modulation, cyclic prefix length and cell ID MIMO measurements

R&S®FSV-K7

AM/FM/φM


measurement demodulator

The R&S®FSV-K7 AM/FM/φM measurement demodulator option converts the R&S®FSV into an analog modulation analyzer for amplitude-, frequency- or phase-modulated signals. It measures not only characteristics of the useful modulation, but also factors such as residual FM or synchronous modulation.


The following display and analysis alternatives are available:

- ▮ Modulation signal versus time
- ▮ Spectrum of the modulation signal (FFT)
- ▮ RF signal power versus time
- ▮ Spectrum of the RF signal (FFT versus max. 18 MHz)
- ▮ Table with numeric display of
 - Deviation or modulation factor, RMS weighted, +peak, -peak, ± peak/2
 - Modulation frequency
 - Carrier frequency offset
 - Carrier power
 - Total harmonic distortion (THD) and SINAD

Condensed data	
Demodulation bandwidth	100 Hz to 28 MHz, 40 MHz optional
Recording time (depends on demodulation bandwidth)	7.5 ms to 3932 s
AF filters	
Highpass filters	20 Hz, 50 Hz, 300 Hz
Lowpass filters	3 kHz, 15 kHz, 23 kHz, 150 kHz and 5%, 10% or 25% of demodulation bandwidth
Deemphasis	25/50/75/750 μs
Modulation frequency	< 14 MHz, > 20 MHz optional, max. 0.5 × demodulation bandwidth
Measurement uncertainty (deviation or modulation factor)	3%

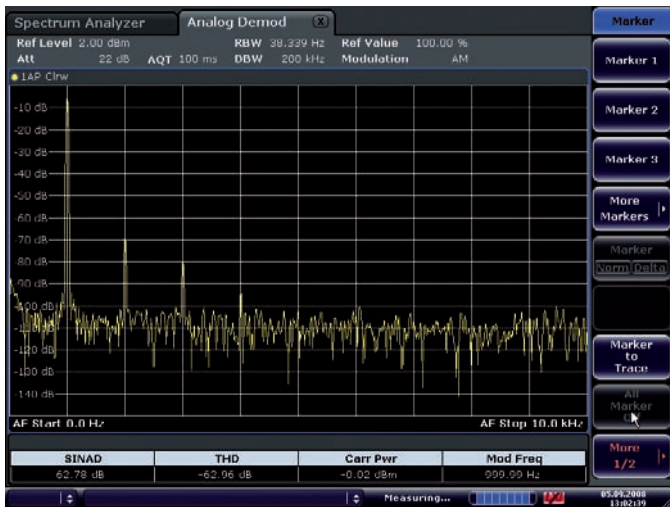

THD measurement on an amplitude-modulated signal. The first harmonic of the modulation signal is well suppressed by 69 dB. This corresponds to a THD (D2) of less than 0.1%.

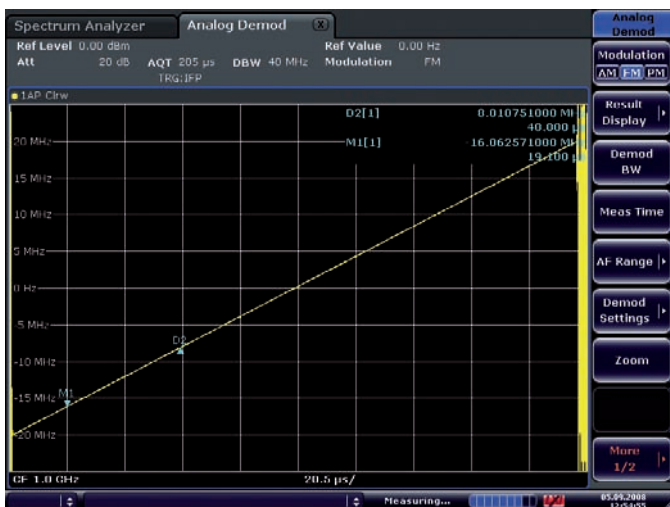


Measurement of the linearity of an FM ramp versus 40 MHz bandwidth.

R&S®FSV-K7S

FM stereo measurement application

The R&S®FSV-K7S option expands the functionality of the R&S®FSV-K7 option by providing measurements on FM stereo transmitters.

The result summary clearly displays the measurement results of all the channels; further switching is not required. Additional displays such as the mono signal or the MPX spectrum display support further analysis.

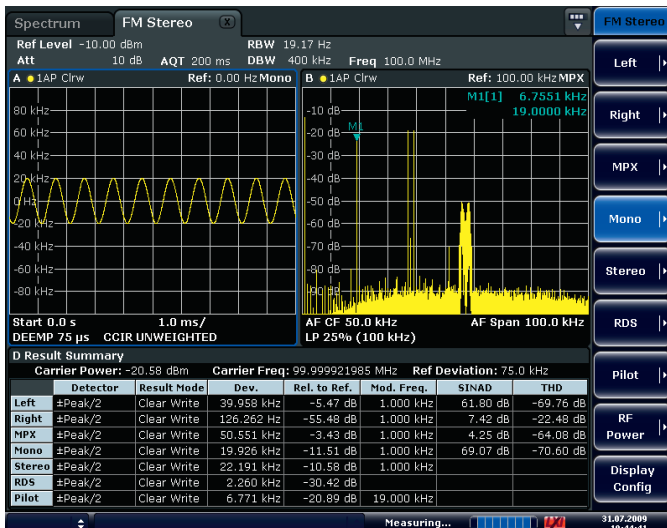

An integrated stereo decoder measures the frequency deviation of the channels left, right, mono and stereo as well as the pilot and RDS carrier. The variety of analysis capabilities is expanded to include THD measurement, time-domain analysis (oscilloscope mode display) and frequency-domain analysis (AF spectrum) of the corresponding channel. To perform standard-compliant S/N ratio measurements, both the compulsory audio filters and the quasi peak detectors are available. A clear result summary displays the numeric results for all measurement channels at the same time and thus enables crosstalk attenuation measurements without having to switch between channels. This means that all measurements necessary on FM stereo transmitters can be performed with the R&S®FSV-K7S option.

Comprehensive measurement functions for complete FM stereo analysis

- Frequency deviation measurement in channels MPX, L, R, M, S and frequency deviation measurement of the pilot and RDS carrier
- Crosstalk measurement
- Carrier power and carrier frequency measurement
- Audio frequency measurement
- Absolute and relative deviation measurement for easy-to-perform S/N ratio and crosstalk attenuation measurement
- AF spectrum display and per channel
- Up to 4 measurement windows

A variety of audio filters and detectors for standard-compliant measurements

- CCIR filter, weighted and unweighted
- Highpass filters 20 Hz, 50 Hz, 300 Hz and lowpass filters 3 kHz, 15 kHz, 23 kHz and 150 kHz
- Selectable deemphasis 50 μ s, 75 μ s, 750 μ s
- Detectors: \pm peak/2, +peak, -peak, RMS, RMS \times SQR2, quasi peak (in accordance with CCIR 468) and quasi peak \times SQR2

Built-in THD measurement

- Automatically tuned to the fundamental
- Simultaneous display of SINAD and THD values
- Selective THD measurement of individual harmonics using marker functions in the AF spectrum display

R&S®FSV-K30

Noise figure and gain measurement application

The R&S®FSV-K30 option expands the R&S®FSV signal and spectrum analyzer by adding measurement functionality otherwise only provided by special noise measurement analyzers.

The following parameters can be measured at a specified frequency or in a selectable frequency range:

- ▮ Noise figure in dB
- ▮ Noise temperature in K
- ▮ Gain in dB


Compared with conventional noise measurement systems, R&S®FSV-K30 has the advantage that a wide variety of further RF measurements can also be performed. The R&S®FSV also allows the measurement of harmonics, intermodulation, spurious responses and many other RF-relevant criteria (for measurements on amplifiers and on frequency-converting DUTs, e.g. low-noise converters).

Noise measurements

- ▮ Measurement range 0 dB to 35 dB
- ▮ Resolution 0.01 dB
- ▮ Device measurement uncertainty 0.05 dB

Gain measurements

- ▮ Measurement range -20 dB to +60 dB
- ▮ Resolution 0.01 dB
- ▮ Measurement accuracy ± 0.2 dB

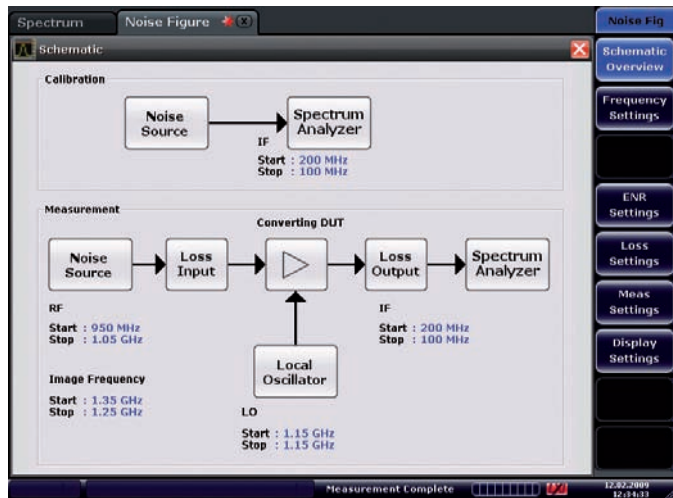


The schematic view of the test setup simplifies measurements on frequency-converting DUTs.

Tabular representation of measurement results.

RF	NF	Noise Temp	Gain
100.000 MHz	1.308 dB	101.300 K	20.995 dB
200.000 MHz	1.129 dB	88.623 K	21.100 dB
300.000 MHz	1.148 dB	87.713 K	21.390 dB
400.000 MHz	1.115 dB	84.919 K	21.475 dB
500.000 MHz	1.163 dB	89.051 K	21.308 dB
600.000 MHz	1.211 dB	93.226 K	21.305 dB
700.000 MHz	1.283 dB	99.656 K	21.557 dB
800.000 MHz	1.352 dB	104.124 K	21.373 dB
900.000 MHz	1.404 dB	110.674 K	21.447 dB
1.000 GHz	1.476 dB	117.394 K	21.579 dB
1.100 GHz	1.460 dB	116.663 K	21.583 dB
1.200 GHz	1.453 dB	115.228 K	21.526 dB
1.300 GHz	1.458 dB	115.710 K	21.646 dB
1.400 GHz	1.524 dB	121.091 K	21.844 dB
1.500 GHz	1.583 dB	127.513 K	21.474 dB
1.600 GHz	1.677 dB	136.629 K	21.580 dB
1.700 GHz	1.788 dB	145.700 K	21.533 dB
1.800 GHz	1.791 dB	148.001 K	20.905 dB

Measurements on an amplifier.

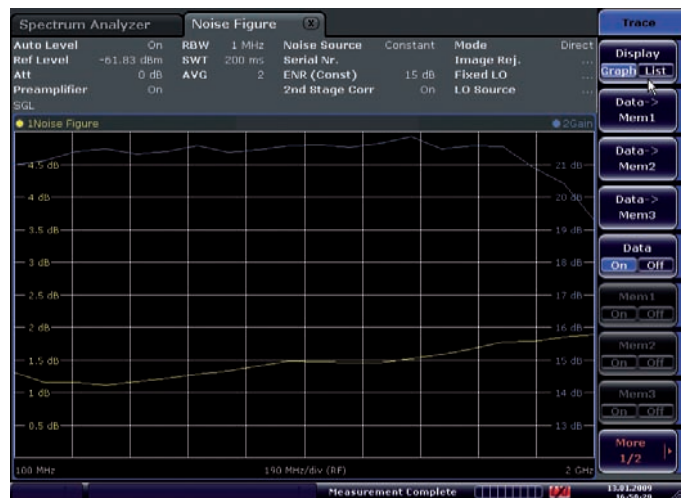


R&S®FSV-K70


Vector signal analysis application

The R&S®FSV-K70 option enables users to flexibly set the analysis of digitally modulated single carriers down to the bit level using the R&S®FSV. The clear-cut operating concept simplifies measurements, despite the wide range of analysis tools.

Overview block diagram.

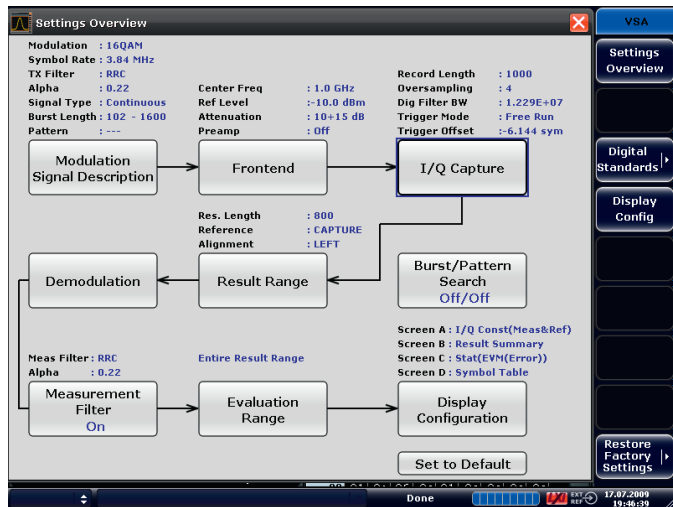

16QAM with four screens.

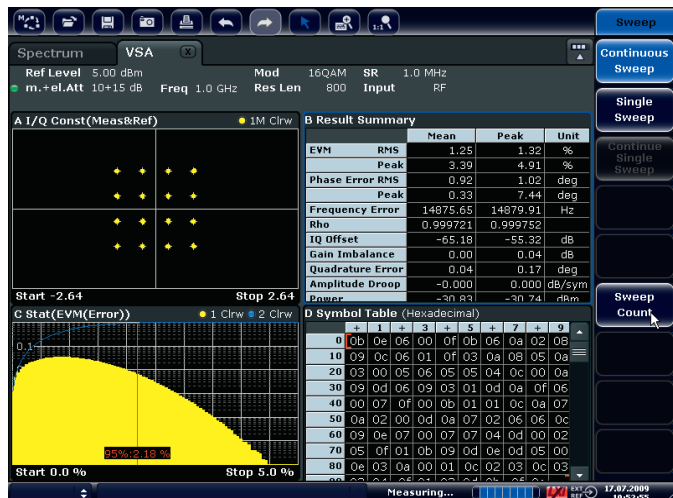

Flexible modulation analysis from MSK to 64QAM

- Modulation formats:
 - 2FSK, 4FSK, MSK, GMSK, DMSK, BPSK, QPSK, Offset-QPSK, DQPSK, 8PSK, D8PSK, $\pi/4$ -DQPSK, $3\pi/8$ -D8PSK, $\pi/4$ -D8PSK, 16QAM, 32 QAM, 64 QAM, 128 QAM, 256QAM, 16 APSK (DVB-S2), 32 APSK (DVB-S2), $\pi/4$ -16QAM (EDGE), $-\pi/4$ -16QAM (EDGE)
- Symbol rate up to 32 MHz
- Analysis length up to 50000 symbols
- Signal analysis bandwidth 28 MHz, 40 MHz optional

Numerous standard-specific default settings

- GSM, GSM/EDGE
- 3GPP WCDMA, CDMA2000®
- TETRA, APCO25
- Bluetooth®, ZIGBEE
- DECT

Easy operation with graphical support

As the demodulation stages and the associated settings are visualized, even beginners and infrequent users can find the correct settings. The combination of touch screen and block diagram simplifies operation and representation.

Based on the description of the signal to be analyzed (e.g. modulation format, continuous or with bursts, symbol rate, transmit filtering), the R&S®FSV-K70 option supports users in automatically finding useful settings.

Flexible analysis tools for detailed signal analysis make troubleshooting really easy

- Display choices for amplitude, frequency, phase, I/Q, eye diagram, amplitude, phase, or frequency error, constellation or vector diagram
- Statistical evaluations
 - Histogram representation
 - Standard deviation and 95:th percentile in the result summary
- Spectrum evaluations of the measurement and error signal considerably support users in finding signal errors such as incorrect filtering or spurious
- A flexible burst search allows the analysis of complex signal combinations, short bursts or signal mix — capabilities that go beyond the scope of many signal analyzers

Specifications in brief

Base unit		
Frequency		
Frequency range	R&S®FSV3	9 kHz to 3.6 GHz
	R&S®FSV7	9 kHz to 7 GHz
	R&S®FSV13	9 kHz to 13.6 GHz
	R&S®FSV30	9 kHz to 30 GHz
	R&S®FSV40	9 kHz to 40 GHz
	R&S®FSV with R&S®FSV-B29 option	20 Hz to 3.6/7/13.6/30 GHz
Aging of frequency reference		1×10^{-6}
	with R&S®FSV-B4 option	1×10^{-7}
Resolution/bandwidths		
Resolution bandwidths	standard sweep	1 Hz to 10 MHz
	standard sweep, zero span	1 Hz to 10 MHz, 20 MHz, 28 MHz ¹⁾ 40 MHz optional
	FFT sweep	1 Hz to 300 kHz
	channel filter	100 Hz to 5 MHz
	EMI filter	200 Hz, 9 kHz, 120 kHz, 1 MHz
Video filter		1 Hz to 10 MHz, 20 MHz, 28 MHz, 40 MHz ¹⁾
Signal analysis bandwidth		28 MHz ¹⁾
	with R&S®FSV-B70 option	40 MHz ²⁾
Displayed average noise level (DANL)		
DANL (1 Hz bandwidth)	1 GHz	-152 dBm, typ. -155 dBm
	3 GHz	-150 dBm, typ. -153 dBm
	7 GHz	-146 dBm, typ. -149 dBm
	13 GHz	-148 dBm, typ. -151 dBm
	30 GHz	-144 dBm, typ. -147 dBm
	40 GHz	-136 dBm, typ. -139 dBm
DANL with preamplifier, R&S®FSV-B22 option	1 GHz	-162 dBm, typ. -165 dBm
	3 GHz	-160 dBm, typ. -163 dBm
	7 GHz	-156 dBm, typ. -159 dBm
DANL with preamplifier, R&S®FSV-B24 option	10 GHz	-164 dBm, typ. -167 dBm
	30 GHz	-159 dBm, typ. -162 dBm
	40 GHz	-154 dBm, typ. -156 dBm
Intermodulation		
Third order intercept (TOI)	$f < 3.6$ GHz	+13 dBm, typ. +16 dBm
	3.6 GHz to 30 GHz	+15 dBm, typ. +18 dBm
Dynamic range WCDMA ACLR	without noise compensation	70 dB
	with noise compensation	73 dB
Phase noise		
1 GHz carrier frequency	10 kHz offset from carrier	-106 dBc (1 Hz), typ. -110 dBc (1 Hz)
	100 kHz offset from carrier	-115 dBc (1 Hz)
	1 MHz offset from carrier	-134 dBc (1 Hz)
Total measurement uncertainty	3.6 GHz	0.29 dB
	7 GHz	0.39 dB
R&S®FSV-B9 tracking generator		
Frequency range	R&S®FSV3	100 kHz to 3.6 GHz
	R&S®FSV7, R&S®FSV13, R&S®FSV30, R&S®FSV40	100 kHz to 7 GHz
Frequency offset		up to 1 GHz
Level range		-60 dBm to 0 dBm

¹⁾ R&S®FSV40, 1307.9002.39: max bandwidth 10 MHz.

²⁾ Not for R&S®FSV40, 1307.9002.39.

Software options

Further information

Separate data sheets are available for the following software options. You can order these data sheets under the numbers specified below.

For R&S®FSV data sheet, see PD 5214.0499.22 and www.rohde-schwarz.com.

Designation	Type	Data Sheet Order No.
Analog Modulation Analysis (AM/FM/ϕM)	R&S®FSV-K7	PD 5214.0530.22
Bluetooth®/EDR Measurements	R&S®FSV-K8	PD 5214.3823.22
GSM/EDGE/EDGE evo Analysis	R&S®FSV-K10	PD 5214.0447.22
Noise Figure and Gain Measurements	R&S®FSV-K30	PD 5214.1837.22
Phase Noise Measurements	R&S®FSV-K40	PD 5214.1843.22
Vector signal analysis	R&S®FSV-K70	PD 5214.0599.22
3GPP BS (DL) Analysis, incl. HSDPA	R&S®FSV-K72	PD 5214.1743.22
3GPP UE (UL) Analysis, incl. HSUPA	R&S®FSV-K73	PD 5214.0976.22
TD-SCDMA BS (DL) Analysis	R&S®FSV-K76	PD 5214.1572.22
TD-SCDMA UE (UL) Analysis	R&S®FSV-K77	PD 5214.1614.22
CDMA2000® BS (DL) Analysis	R&S®FSV-K82	PD 5214.1714.22
CDMA2000® MS (UL) Analysis	R&S®FSV-K83	PD 5214.4136.22
1xEV-DO BS (DL) Analysis	R&S®FSV-K84	PD 5214.1850.22
1xEV-DO MS (UL) Analysis	R&S®FSV-K85	PD 5214.4859.22
WLAN IEEE 802.11a/b/g/j Analysis	R&S®FSV-K91	PD 5214.1450.22
WLAN IEEE 802.11n Analysis	R&S®FSV-K91n	PD 5214.1450.22
WiMAX™ IEEE 802.16e OFDM/OFDMA Analysis	R&S®FSV-K93	PD 5214.1466.22
OFDM Vector Signal Analysis	R&S®FS-K96	PD 5214.4820.22
OFDM Vector Signal Analysis	R&S®FS-K96PC	PD 5214.4820.22
EUTRA/LTE Downlink PC Software	R&S®FSV/FSQ-K100/-K102/-K104	PD 5213.8521.22
EUTRA/LTE Uplink PC Software	R&S®FSV/FSQ-K101/-K105	PD 5213.9186.22
Distortion Analysis Software	R&S®FS-K130PC	PD 5214.4113.22

Ordering information

Designation	Type	Order No.
Base unit (including supplied accessories such as power cable and manual)		
Signal and Spectrum Analyzer, 9 kHz to 3.6 GHz	R&S®FSV3	1307.9002.03
Signal and Spectrum Analyzer, 9 kHz to 7 GHz	R&S®FSV7	1307.9002.07
Signal and Spectrum Analyzer, 9 kHz to 13.6 GHz	R&S®FSV13	1307.9002.13
Signal and Spectrum Analyzer, 9 kHz to 30 GHz	R&S®FSV30	1307.9002.30
Signal and Spectrum Analyzer, 9 kHz to 40 GHz	R&S®FSV40	1307.9002.39 ¹⁾
Signal and Spectrum Analyzer, 9 kHz to 40 GHz	R&S®FSV40	1307.9002.40
Hardware options		
Ruggedized Housing	R&S®FSV-B1	1310.9500.02
AM/FM Audio Demodulator	R&S®FSV-B3	1310.9516.02
OCXO, Precision Reference Frequency	R&S®FSV-B4	1310.9522.02
OCXO, Precision Reference Frequency Stability	R&S®FSV-B4	1310.9522.03
Additional Interfaces (IF/video/AM/FM output, AUX port, trigger output, two additional USB ports)	R&S®FSV-B5	1310.9539.02
Tracking Generator 100 kHz to 3.6 GHz/7 GHz	R&S®FSV-B9	1310.9545.02
External Generator Control	R&S®FSV-B10	1310.9551.02
Digital Baseband Interface	R&S®FSV-B17	1310.9568.02 ²⁾
Solid state disk (removable hard drive)	R&S®FSV-B18	1310.9697.03

Designation	Type	Order No.
Spare Hard Drive (removable hard drive)	R&S®FSV-B19	1310.9574.02
LO/IF Ports for External Mixers	R&S®FSV-B21	1310.9597.02
Preamplifier 9 kHz to 3.6 GHz/7 GHz	R&S®FSV-B22	1310.9600.02
Preamplifier 9 kHz to 13.6 GHz	R&S®FSV-B24	1310.9616.13
Preamplifier 9 kHz to 30 GHz	R&S®FSV-B24	1310.9616.30
Preamplifier 9 kHz to 40 GHz	R&S®FSV-B24	1310.9616.40
Electronic Attenuator (1 dB steps)	R&S®FSV-B25	1310.9622.02
Frequency Range Extension to 20 Hz	R&S®FSV-B29	1310.9639.02
40 MHz Analysis Bandwidth	R&S®FSV-B70	1310.9645.02 ²⁾
Software options		
Analog Modulation Analysis (AM/FM/φM)	R&S®FSV-K7	1310.8103.02
FM Stereo Measurements for R&S®FSV-K7	R&S®FSV-K7S	1310.8126.02
Bluetooth®/EDR Measurement Application	R&S®FSV-K8	1301.8155.02
Power Sensor Support (power measurement with the R&S®NRP power sensors)	R&S®FSV-K9	1310.8203.02
GSM/EDGE/EDGE evo Analysis	R&S®FSV-K10	1310.8055.02
Spectrogram Measurements	R&S®FSV-K14	1310.8255.02
Noise Figure and Gain Measurements	R&S®FSV-K30	1310.8355.02
Phase Noise Measurements	R&S®FSV-K40	1310.8403.02
Vector Signal Analysis	R&S®FSV-K70	1310.8455.02
3GPP BS (DL) Analysis, incl. HSDPA and HSDPA+	R&S®FSV-K72	1310.8503.02
3GPP UE (UL) Analysis, incl. HSUPA	R&S®FSV-K73	1310.8555.02
TD-SCDMA BS Measurements	R&S®FSV-K76	1310.8603.02
TD-SCDMA UE Measurements	R&S®FSV-K77	1310.8655.02
CDMA2000® BS (DL) Analysis	R&S®FSV-K82	1310.8703.02
CDMA2000® MS (UL) Analysis	R&S®FSV-K83	1310.8755.02
1xEV-DO BS (DL) Analysis	R&S®FSV-K84	1310.8803.02
1xEV-DO MS (UL) Analysis	R&S®FSV-K85	1310.8773.02
WLAN IEEE 802.11a/b/g/j Analysis	R&S®FSV-K91	1310.8903.02 ²⁾
WLAN IEEE 802.11n Analysis	R&S®FSV-K91n	1310.9468.02 ²⁾
WiMAX™ IEEE 802.16e OFDM/OFDMA Analysis	R&S®FSV-K93	1310.8955.02 ²⁾
EUTRA/LTE FDD Downlink Analysis	R&S®FSV-K100	1310.9051.02 ²⁾
EUTRA/LTE FDD Uplink Analysis	R&S®FSV-K101	1310.9100.02 ²⁾
EUTRA/LTE Downlink MIMO Analysis	R&S®FSV-K102	1310.9151.02 ²⁾
EUTRA/LTE TDD Downlink Analysis	R&S®FSV-K104	1309.9774.02 ²⁾
EUTRA/LTE TDD Uplink Analysis	R&S®FSV-K105	1309.9780.02 ²⁾
Service options		
Two-Year Repair Service following the warranty period	R&S®RO2FSV	Please contact your local Rohde & Schwarz office
Three-Year Repair Service following the warranty period	R&S®RO3FSV	
Five-Year Repair Service following the warranty period	R&S®RO5FSV	
Two-Year Calibration Service	R&S®CO2FSV	
Three-Year Calibration Service	R&S®CO3FSV	
Five-Year Calibration Service	R&S®CO5FSV	

¹⁾ Maximum bandwidth 10 MHz.

²⁾ Not available for R&S®FSV40, 1307.9002.39.

Service you can rely on

- | Worldwide
- | Local and personalized
- | Customized and flexible
- | Uncompromising quality
- | Long-term dependability

About Rohde & Schwarz

Rohde & Schwarz is an independent group of companies specializing in electronics. It is a leading supplier of solutions in the fields of test and measurement, broadcasting, radiomonitoring and radiolocation, as well as secure communications. Established more than 75 years ago, Rohde & Schwarz has a global presence and a dedicated service network in over 70 countries. Company headquarters are in Munich, Germany.

Environmental commitment

- | Energy-efficient products
- | Continuous improvement in environmental sustainability
- | ISO 14001-certified environmental management system

Certified Quality System
ISO 9001

Rohde & Schwarz GmbH & Co. KG

www.rohde-schwarz.com

Regional contact

- | Europe, Africa, Middle East
+49 89 4129 137 74
customersupport@rohde-schwarz.com
- | North America
1 888 TEST RSA (1 888 837 87 72)
customer.support@rsa.rohde-schwarz.com
- | Latin America
+1 410 910 79 88
customersupport.la@rohde-schwarz.com
- | Asia/Pacific
+65 65 13 04 88
customersupport.asia@rohde-schwarz.com

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG
Trade names are trademarks of the owners | Printed in Germany (as/kr)
PD 5214.0499.12 | Version 07.00 | September 2010 | R&S®FSV
Data without tolerance limits is not binding | Subject to change
© 2009 - 2010 Rohde & Schwarz GmbH & Co. KG | 81671 München, Germany



5214049912