



6512 SHIELDED LOOP ANTENNA



Frequency Range: 10 kHz - 30 MHz. The Model 6512 is a passive loop antenna designed for both emissions and immunity tests.



[REQUEST FOR QUOTE](#)



[Send this page](#)



[Print Version - all info](#)

Description	Config	Specs	Charts	All Info
-----------------------------	------------------------	-----------------------	------------------------	--------------------------

Key Features

- Individually Calibrated
- Remote Monitor Option
- Two Year Warranty

Description

Every loop antenna can be individually calibrated in accordance with the IEEE-291 Section 2.3.1 methods, using NIST traceable equipment. By knowing the actual antenna factors and performance characteristics of an antenna instead of typical data, you can more accurately measure field strength in your tests.

Standard Configuration

- Mounting Bracket drilled accepts an ETS-Lindgren or other tripod mount with standard 1/4 in x 20 threads.

Options

- Custom cases are available on request.

Electrical Specifications


Frequency Minimum	10 kHz
Frequency Maximum	30 MHz
Connectors	BNC (f)
Maximum Input Power	20 W
Pattern Type	omnidirectional
Polarization	linear

Physical Specifications


Length	3.8 cm (1.50 inches)
Weight	1.6 kg (3.53 lb)
Width	12.7 cm (5.00 inches)

Technical Charts

6512 Electric Antenna Factor

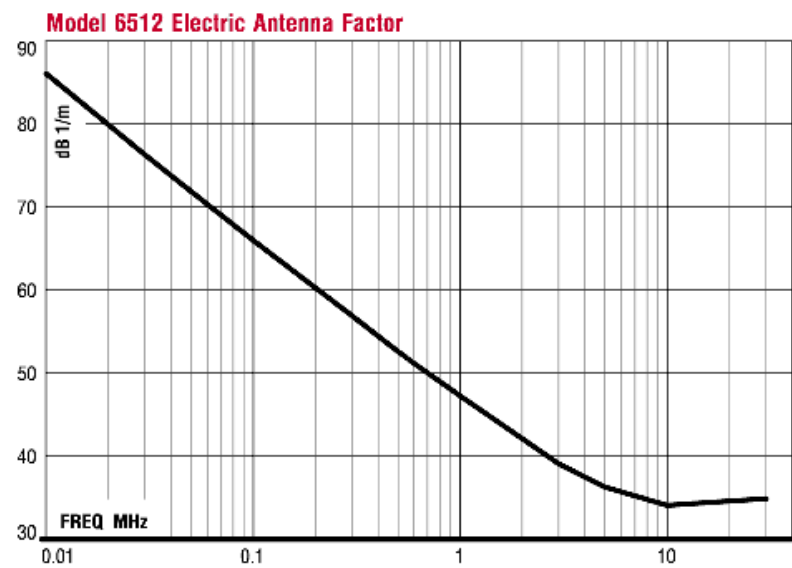

6512 Magnetic Antenna Factor

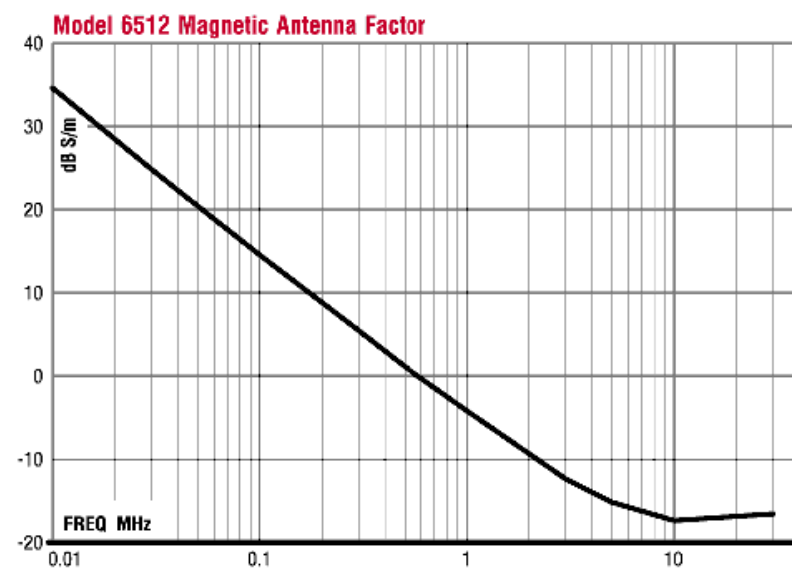

© 2011 ETS-Lindgren [Privacy](#) [Site Map](#) [Careers](#)