



DIGITAL PROTRACTOR


POPULAR
MODEL

DATA
OUTPUT

ABSOLUTE
ZERO

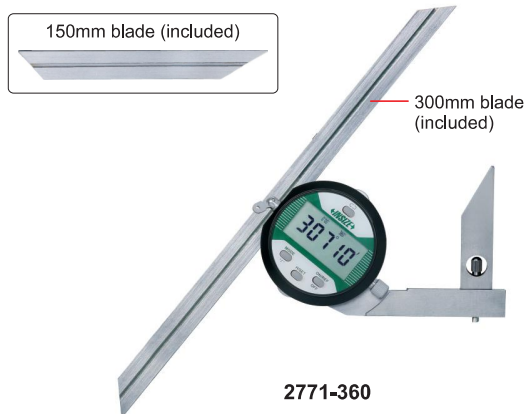


- Absolute zero, zero setting is not needed when batteries are replaced
- Button function: choose 0-90°, 0-180° or 0-360° display, change resolution, display flips over, data hold, zero, on/off supplementary angle measurement
- Battery CR2032, automatic power off, data output
- Made of stainless steel
- Optional square for zero setting
- Optional accessory: clamp (code **2372-CLAMP**), suitable for height gauges **1156**, **1150-300**, **1351**, **1250** and **1151**, wireless transmitter code **7315-2771** (receiver is needed)



square (optional)



clamp for height gauges (optional)

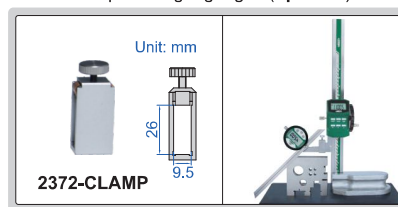

Square
(for zero setting,
optional)

Code
2771-S90

Code	Range	Resolution	Accuracy
2771-360	0-360°	1°/0.01°	±5'