




Quality is the lifeblood of industrial products; every screw is the object we concerned.

TE-OAT Series Oil-Immersed Test Transformers

Brief Introduction:

TE—OAT Series Oil-Immersed Test Transformers, a popular high voltage test equipment in China, which is widely used in AC hipots, The series of test transformer is small, light weight, compact structure, complete protection, versatility and so on. Apply to the hipot of electrical components, and insulation materials of electrical system, etc.

Appearance and configuration:

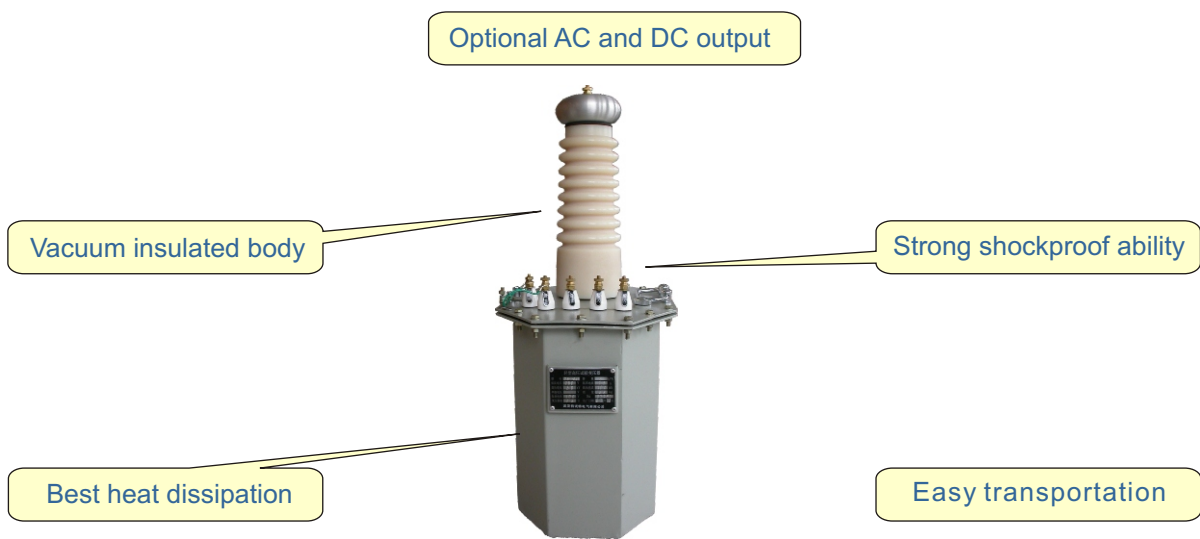

Technical Parameters:

Model	Capacity (kVA)	High Voltage Voltage (kV)	High Voltage Current (mA)	Low voltage input		Turns Ratio (high voltage side / instrument side)	Temperature rise ℃(30 min)
				Voltage (V)	Current (A)		
OAT 3/50	3	50	60	200	15	500	10
OAT 5/50	5	50	100	200	25	500	10
OAT 10/50	10	50	200	200	50	500	10
OAT 5/100	5	100	50	200	25	1000	10
OAT 10/100	10	100	100	200	50	1000	10
OAT 20/100	20	100	200	380	53	1000	10
OAT 30/100	30	100	300	380	79	1000	10
OAT 50/100	50	100	500	380	132	1000	10
OAT 30/150	30	150	200	380	80	1000	10
OAT 50/150	50	150	333	380	132	1000	10
OAT 100/200	100	200	500	380	263	1000	10
OAT300/300	300	300	3000	380	790	1000	10

